


**NOTES:**

1. W.P. JOINTS REQUIRED ON CENTERLINE FOR DRIVEWAYS 12' TO 20' WIDE. DRIVEWAYS 24' TO 30' WIDE SHALL HAVE 2 W.P. JOINTS EVENLY SPACED (AT 1/3 AND 2/3 POINTS).
2. PLACE SCORE MARKS AT 1/4 POINTS ON DRIVEWAYS 12' TO 20' WIDE AND AT 1/6 POINTS ON DRIVEWAYS 24' TO 30' WIDE. SCORE MARK REQUIRED AT DRIVEWAY SLOPE BREAK PARALLEL TO EXISTING FACE OF CURB.
3. 18" WIDE BAND OF PAVEMENT SHALL BE REMOVED AND REPLACED. SEE NOTE 5 OF GENERAL NOTES (APPENDIX A) FOR REQUIREMENTS.
4. WHERE THE DISTANCE BETWEEN NEW DRIVEWAY LIMIT AND PROPERTY LINE IS LESS THAN 6 FEET AT THE BACK OF DRIVEWAY AND THERE IS AN ADJACENT DRIVEWAY LESS THAN 12 FEET DISTANCE AWAY, THE SIDEWALK SHALL NOT TRANSITION. NEW SIDEWALK SHALL TERMINATE AT PROPERTY LINE.
5. WHERE THE DISTANCE BETWEEN NEW DRIVEWAY AND PROPERTY LINE IS EQUAL TO OR GREATER THAN 6 FEET AT THE BACK OF DRIVEWAY AND THERE IS NO ADJACENT DRIVEWAY WITHIN 12 FEET DISTANCE OF NEW DRIVEWAY, THE SIDEWALK SHALL TRANSITION FROM BACK OF DRIVEWAY TO EXISTING SIDEWALK.

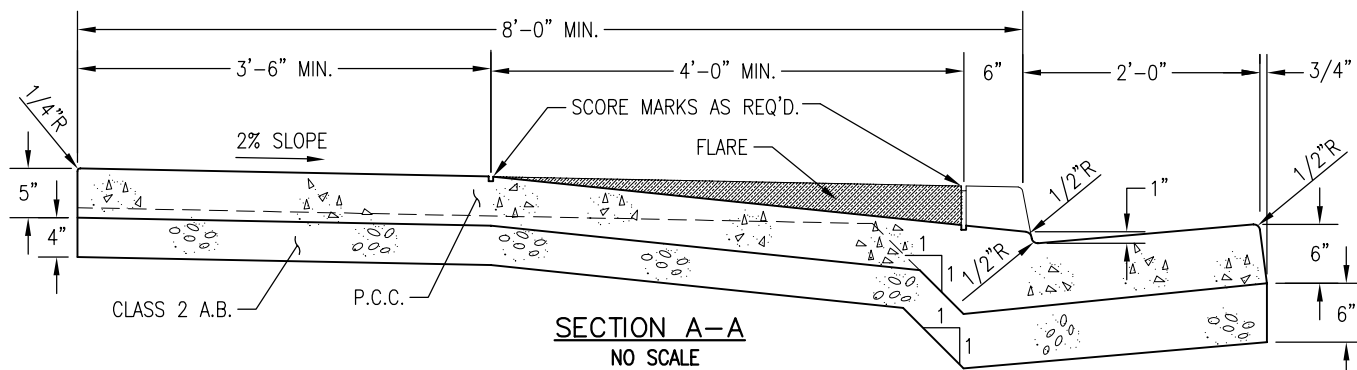

DRAWN BY: M. LEE

CHECKED BY: S. THACH

APPROVED BY: T. SUPAN

DATE: JANUARY 2007

**RESIDENTIAL DRIVEWAY  
WITH ATTACHED SIDEWALK**

CITY OF SANTA CLARA

**ST-1**

PAGE: 1